

RackNES: A Voltage-Controlled NES Emulator as a Musical Instrument

Christian Kauten
Arhythmic Units
arhythmic.units@gmail.com

September 30, 2026 / Technical report, manuscript version 1

Abstract

RackNES embeds a Nintendo Entertainment System emulator in VCV Rack and exposes console execution to a modular synthesizer patch. Controller gates, clock-rate modulation, state recall, and individual audio outputs make the running program part of the instrument. The CV Genie expander adds named, game-specific memory writes, allowing patch signals to reach variables used by game logic and music drivers. This retrospective describes the instrument’s foundations and implementation, organized around three intervention layers: gameplay, execution, and memory. It explains the host-to-emulator timing boundary, inherited sound synthesis, connection-dependent mixing, and the difference between recalling machine state and replaying a recorded waveform. The timing and snapshot boundaries reveal how implementation choices shape the meaning of these controls. The contribution is a documented design for treating an executable console program as patchable musical material, together with engineering lessons about temporal coupling and state ownership. The account is based on the released implementation and its documentation; it reports no performance measurements or user study.

Keywords: musical interfaces; console emulation; chiptune; voltage control; state recall; modular synthesis.

1 Introduction

An NES game already contains a system for organizing sound: a program selects events, advances musical sequences, assigns voices, and writes sound-chip registers in response to changing game state. Bringing that program into a modular synthesizer exposes a different kind of musical material from a bank of isolated waveforms. A patch can act on the computation that produces sound, as well as on the sound after it leaves the console.

RackNES implements this idea as a VCV Rack module. It loads a cartridge image, runs an emulated CPU, picture processing unit (PPU), and audio processing unit (APU), and presents the resulting video and five audio voices. Patch signals can operate two controllers, change execution rate, request save and restore operations, and suspend execution. CV Genie, an expander contributed by @anlexmatos, supplies a further interface to selected memory locations. The instrument’s vocabulary therefore includes actions such as changing the rate at which a game runs, returning to a saved execution state, and changing a music driver’s current song or sequence position.

The project changelog records an initial release in June 2020 and the Rack 2 port in February 2022. This report documents version 2.1.0 at source revision `e8c99bf86295`, examined in September 2026 [1]. The historical implementation is the object of the account. Mathematical

expressions below describe its source-level behavior; patch examples describe possible uses of its controls. Neither is presented as a runtime experiment.

The paper contributes an architectural account of whole-console integration, a description of three distinct intervention layers, and an analysis of the engineering boundaries that give those interventions their meaning. It makes no priority claim for console instruments, game-based musical interfaces, or clock manipulation. Its focus is the particular combination of a running game, modular control, and access to the console’s own voices.

2 Foundations and Related Work

2.1 Voltage control and musical mappings

Moog’s account of voltage-controlled oscillators, amplifiers, and filters established a modular vocabulary in which one signal can alter the behavior of another process [2]. RackNES extends that vocabulary to program execution: its rate control affects the coupled machine that produces both graphics and sound. The exponential control law is familiar in synthesis, but its target here includes instruction execution and game logic.

The relationship between control and sound is a design choice. Hunt, Wanderley, and Paradis argue for treating mapping as a central part of musical interface design [3]. RackNES makes this issue unusually visible. A controller gate can have a discrete and context-dependent effect

mediated by game rules; changing the clock acts across subsystems; a memory write can target a single named variable. These controls differ in semantic reach even when all arrive as voltages at adjacent input ports.

Gonçalves’s ADDAC work places programmable computation inside a voltage-controlled synthesis environment [4]. It provides a foundation for understanding a computer as a module with musical inputs and outputs. In RackNES, the computation being exposed is a cartridge program and its emulated machine, giving the control interface an additional layer of inherited behavior.

2.2 Games as musical systems

Collins traces the relationship between early game-music practices and technical constraints, including the organization of repeating musical material [5]. This history matters because an emulated game brings its existing musical organization with it. RackNES does not need to reconstruct a score from the audio output: the cartridge program continues to execute its own sequencing and voice-allocation procedures. Their behavior depends on the particular program, so an NES sound palette alone does not describe the resulting instrument.

McAlpine’s history of chiptunes situates these practices within changing hardware, software interfaces, and performance contexts [6]. Purpose-built trackers such as Little Sound Dj make console sound resources available through authored patterns and song structures [7]. Such tools establish console hardware as a compositional medium. RackNES uses the loaded program’s existing sound routines as part of its control structure, which can include gameplay as well as explicitly musical software.

Olson’s *Emstrument* provides a direct precedent for making an emulated game into a musical interface [8]. It observes game memory through Lua scripts and maps game state to MIDI, leaving the game’s original audio unmodified. The work establishes reverse engineering and game-state mapping as musical-interface techniques. RackNES places interventions at controller, execution, and memory boundaries and exposes audio from the emulated APU. This locates the design within an existing practice without implying a ranking of musical value or usability.

SoundCraft treats game activity as compositional input, extracting data from a custom StarCraft 2 map and communicating through OSC to Chuck for auralization [9]. Together these systems show how game processes can organize music beyond playback of a fixed soundtrack. They motivate being explicit about where a musical mapping acts: on observed game events, on program state, or on the sound-generation process.

Physical console instruments also make execution speed available to performers. LOOK MUM NO COMPUTER’s *Gameboy Megamachine* documents voltage-controlled button inputs and CPU-speed control in a multi-console instrument [10]. It is a practical precedent for coupled changes in a console’s behavior and sound.

The software setting considered here adds host-managed patching and serialized state, while retaining the important idea that the console itself can be manipulated as an instrument.

2.3 Emulation and reusable sound infrastructure

The NESdev technical reference documents the console’s timing and sound architecture, including the NTSC CPU–PPU clock relationship and nonlinear audio mixing [11, 12]. These are useful reference points for understanding the system being modeled; they do not certify an emulator’s fidelity. RackNES adapts Amish Naidu and contributors’ SimpleNES core [13], through the author’s *nes-py* project [14]. Its audio path uses Shay Green’s (blargg’s) *Nes_Snd_Emu* and *Blip_Buffer* libraries [15]. *Blip_Buffer* represents sound through timed amplitude changes and converts these events to band-limited samples. This separates the sound chip’s clocked events from the host’s sample stream.

These dependencies provide substantial prior engineering. RackNES’s contribution is the integration and control interface around them, rather than a new CPU emulation method or a new band-limited synthesis algorithm. The video path also uses Green’s *nes_ntsc* filter [16]. VCV Rack supplies the module lifecycle, voltage ports, sample-processing interface, and expander messaging [17]. Together these components allow a console’s internal activity to participate in a larger patch.

3 The Console as a Patchable Process

3.1 Architecture and execution boundary

Figure 1 summarizes the implementation. The Rack module owns an emulator with a cartridge, two controllers, main and picture buses, CPU, PPU, and APU. Memory-mapped callbacks connect CPU-visible addresses to controller reads, graphics registers, and sound registers. The DMC channel reads sample data through a callback into the main bus. Thus game logic and audio remain connected through the program’s ordinary register writes.

For each host sample, `RackNES::process` first handles a pending cartridge load, acquires divided-rate controls when due, and consumes expander messages. Unless execution is suspended, it then runs a number of emulator cycles, updates the frame-derived gate, extracts audio for each voice, and forms the mix. An emulator cycle calls the PPU three times, the CPU once, and the APU wrapper once. This follows the NTSC 3:1 PPU-to-CPU relation [11]; it is a description of the stepping arrangement, not a claim of cycle-accurate hardware reproduction.

At the pinned revision, the cartridge layer supports mapper numbers 0–3: NROM, MMC1, UNROM, and CNROM. That boundary is important for reuse: whole-console control does not imply support for every cartridge or expansion sound device. Although additional sound-chip implementations are present in the bundled library,

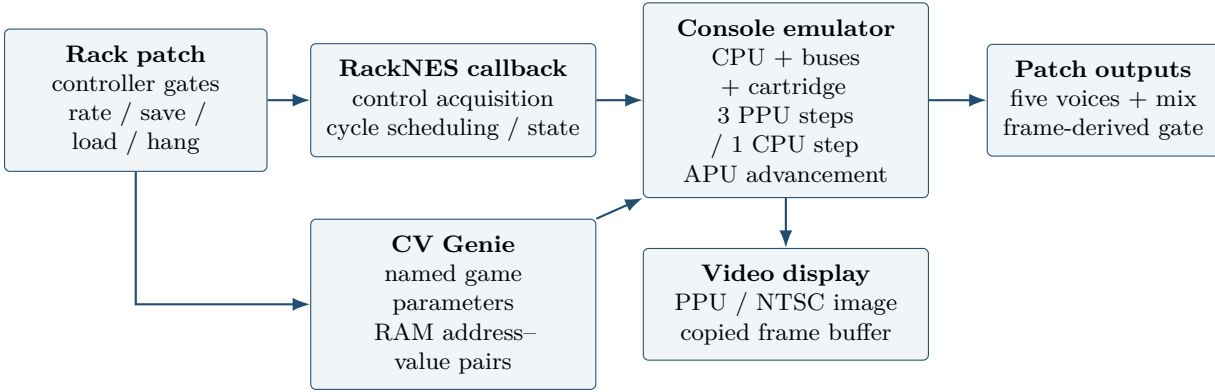


Figure 1: The host callback advances a coupled console and returns its voices and a frame-derived gate to the patch. Controller, execution, and memory interventions enter at different boundaries. State operations act on serialized emulator components; the diagram does not imply that all host and rendering state is included in a snapshot.

the module routes the five base NES voices. A program must first work within the implemented cartridge and machine model before its musical behavior can be controlled through the patch.

Mapper updates (September 2026). The development implementation through 2cea414, reviewed at 62cbf7a, supports IDs 0–4, 7, and 9. The additions are AxROM/AOROM (7, 4e11320), MMC2/PxROM (9, 8013d8f), and MMC3B/C TxROM (4, 2cea414). These changes follow the historical revision above and are not a claim of a published Library release.

AxROM adds 32 KiB PRG switching and one-screen nametable selection, with reviewed bus-conflict variants. MMC2 adds post-read CHR latches: the triggering read returns the old bank’s byte before selecting the next bank. Its renderer retains fetched pattern bytes in snapshots to avoid repeating side effects, but sprite fetches still follow the coarse scanline model. MMC3 adds bank inversion, banked CHR RAM, RAM protection, four-screen storage, and timed A12 observations. Its ten-PPU-dot low filter approximates hardware M2 filtering; MMC3A, MMC6, and sub-cycle phase accuracy are excluded.

Independent mapper and APU IRQ levels now reach CPU instruction boundaries with latched NMI priority. Stack-status corrections and refreshed APU IRQ scheduling preserve pending-source behavior across restoration. These shared changes can alter IRQ-dependent software, including its sound. Cartridge clones for the three new mappers rebind ROM and mirroring callbacks, while validated mapper fields protect their state-loading paths. This does not establish complete validation or deterministic audio-buffer continuation for all legacy emulator state.

The new loaders accept exact-size NTSC cartridge subsets. AxROM accepts 32–256 KiB PRG ROM with 8 KiB CHR RAM; MMC2 accepts 32–128 KiB PRG and 8–128 KiB CHR ROM; MMC3 accepts 32–512 KiB PRG and 8–256 KiB CHR ROM or 8 KiB CHR RAM. ROM

sizes are powers of two. MMC2 and MMC3 use 8 KiB PRG RAM. NES 2.0 declarations must match the reviewed layouts; this is not general format support or evidence of Pulsar/PR8 compatibility. Raw SRAM file interchange remains restricted to reviewed mapper 0–3 layouts, whereas patches and SAVE snapshots retain the new mappers’ cartridge RAM.

Recorded macOS arm64 sanitizer checks cover banking, state, DMA/DMC reads, and synthetic IRQ servicing. Five-channel PCM and frame counts match the reference workload at 44.1, 48, 96, and 192 kHz, for 2,000 host samples per rate at nominal speed and two Blip clocks (1,789,773 and 768,000 Hz). Synthesis and buffer clocks remain unchanged; this bounded comparison is not gameplay, listening, clock-extreme, or cross-platform validation. MMC5 (5) and FME-7/5B (69) have implementation specifications only, and expansion synthesis remains absent. `sources.md` and specification 001 record the evidence and remaining gates separately from the historical account.

3.2 Three intervention layers

At the *gameplay layer*, sixteen gate inputs represent the eight buttons on each of two controllers. Buttons are combined into bitmaps and delivered through the emulator’s controller interface. A gate therefore retains the game’s interpretation of a press: it may move an object, start a sequence, or have no effect in the current state. This layer preserves the program’s existing rules as part of the mapping from gesture to sound.

At the *execution layer*, rate, save, load, reset, and hang controls act on the machine that interprets those gestures. Their effects cut across individual voices. Rate changes how far the coupled machine advances between host samples; state recall selects an earlier computational condition from which execution continues. These operations make temporal structure available without requiring a separate mapping for every game variable.

At the *memory layer*, CV Genie supplies selected values

to RAM locations named by game-specific maps. This bypasses the need to reach a condition through ordinary gameplay. The layers can be used together, but they provide different levels of explanation to a performer: a controller label names an action, an execution control names a machine operation, and a memory label interprets an address in a particular program.

4 Timing and Audio Integration

4.1 Requested rate and actual cycle scheduling

Let $p \in [-4, 4]$ be the clock knob, $a \in [-1, 1]$ the attenuverter, and $v[n]$ the clock input in volts. The requested rate, before conversion to an integer, is

$$\begin{aligned} f_r[n] &= f_0 2^{\text{clip}(p+a v[n]/5, -4, 4)}, \\ f_0 &= 1,789,773 \text{ Hz}. \end{aligned} \quad (1)$$

The nominal range is $f_0/16$ to $16f_0$. With $a = 1$, an increase of 5 V adds one octave to the requested execution rate until clipping occurs. The clock input therefore has a different scaling from a conventional 1 V/octave pitch input. Because the CPU, PPU, and APU wrapper advance together, the control changes the temporal basis of gameplay, graphics, and sound events. It is not an independent musical-tempo parameter.

The current implementation returns the requested rate as an unsigned integer and compares an integer loop index against its floating-point quotient by the host sample rate F_s . For a stable positive quotient $q[n]$, the number of loop iterations is

$$q[n] = \frac{\lfloor f_r[n] \rfloor}{F_s}, \quad N[n] = \lceil q[n] \rceil, \quad (2)$$

apart from finite-precision effects in forming $q[n]$. No fractional-cycle remainder is carried to the next sample. The distinction between requested rate and executed work is therefore structural: for a constant quotient, the executed rate is $F_s N$, and its excess over the integer request lies in $[0, F_s)$ under ideal arithmetic. This is a deduction from the loop, not a measured timing error. It explains why the knob law alone cannot establish calibrated pitch or exact console timing.

The controller and save/load/reset/hang inputs are acquired once every sixteen host samples. They have a control-grid spacing of $16/F_s$; a short pulse entirely between acquisitions can be missed. Clock-rate CV is read inside the cycle-loop condition, and expander handling runs each host sample, so the sixteen-sample divider does not describe all controls. Keeping these cadences distinct is necessary when reasoning about a patch that combines them.

4.2 Frame clock and video

The emulator maintains a counter modulo 29,781 cycles for its frame callback. The clock output is 10 V during one half of this counter's period and 0 V during the other

half. The same counter requests screen-buffer copies. It provides a convenient execution-derived clock, but is distinct from the PPU's own scanline and rendering state. In particular, it should not be interpreted as the CPU clock itself, despite the port's metadata label, or as a guarantee of exact video-frame synchronization.

The PPU produces image data that passes through the bundled NTSC filter; the widget displays the copied image. This visual connection helps preserve the recognizable game context of the instrument. Screen-copy work also occurs within the sample-processing path when the emulator counter wraps, tying display publication to execution without making the display refresh rate the driver of emulation.

4.3 Sound rendering and patch-dependent mixing

RackNES routes each of the APU's two pulse voices, triangle voice, noise voice, and delta modulation channel to its own `Blip_Buffer`. The wrapper ends an APU frame and each buffer frame after every emulated CPU step. Here a library "frame" is a span of sound-emulation time, not a video frame. The buffers' output sample rate follows the host, while the module sets their source-clock conversion rate to a fixed 768,000 Hz. That value is distinct from both f_0 and its voltage-controlled requested rate.

At extraction, an empty buffer yields zero. Otherwise, the wrapper allocates a temporary vector, reads all available samples, and returns only the first. Consequently, the use of band-limited synthesis inside the dependency does not by itself establish a faithful host-rate output stream. The fixed conversion clock, advancement count, and extraction policy jointly determine the module's audio. Treating the control as a simple resampling ratio would conceal this boundary.

For returned signed sample $s_i[n]$ and channel gain $g_i \in [0, 2]$, the implemented voltage scaling is

$$y_i[n] = g_i \frac{10s_i[n]}{32767}. \quad (3)$$

This is a numerical conversion, not a measured peak-to-peak level. Let $\mathcal{U}[n]$ contain the voices whose individual output ports are unconnected, and let $g_m \in [0, 2]$ be the mix gain. The mix is

$$y_m[n] = g_m \sum_{i \in \mathcal{U}[n]} y_i[n]. \quad (4)$$

Connecting a voice removes it from the mix, so patch topology changes the mixing rule. A performer can send noise to a separate processor while keeping the remaining voices together. This linear summation of separated outputs does not reproduce the NES's coupled nonlinear analog mixer [12]. The resulting interface prioritizes access to individual voices.

5 State and Memory as Musical Material

5.1 Recalling an executable condition

Save captures one JSON backup of emulator state; load restores that backup. The serialized components include the cartridge, controllers, CPU, PPU, APU snapshot, and main and picture buses. Binary data use the bundled *cxx-base64* implementation [18]. The module also stores its current emulator state and backup in the host’s patch serialization, retaining the cartridge’s file path as a dependency.

This mechanism suggests a form of sampling whose object is an executable condition. Repeatedly requesting load can revisit a passage in a game’s behavior, but the subsequent evolution still depends on the running program and future inputs. A controller change or RAM intervention after recall can lead to another trajectory. The useful design distinction is between restarting a computation and replaying already rendered audio; identical waveform repetition is not implied.

Operation ordering also matters. During control acquisition, save is handled before reset, and reset before load. Controller bitmaps are updated afterward. Thus simultaneous requests have a defined source-level order rather than being independent actions. Hang is checked after control acquisition and expander handling. While it prevents further console stepping and output updates, it still permits these control operations and RAM writes. It holds the previous output voltages rather than explicitly muting them; a downstream VCA is the appropriate patch element when silence is required.

The snapshot boundary is incomplete: the emulator’s frame counter, rendered pixel buffers, and *Blip_Buffer* contents are not serialized, and the current serializers have additional field-level omissions and defects documented in the source notes. Recall therefore revisits program conditions without a guarantee of restoring audiovisual phase. This boundary matters when a performance depends on the alignment of recalled events with an external clock.

5.2 CV Genie and program-specific semantics

CV Genie provides eight input lanes. Each lane selects a named game parameter. Numeric parameters linearly map a nominal 0–10 V input into configured byte ranges, while toggle parameters flip a local boolean on rising edges and send 0 or 1. Numeric inputs are not clamped by this mapping. The expander sends address–value pairs through Rack’s message buffers. RackNES consumes these pairs and writes the values directly into its RAM buffer. An address value of zero marks an unused or consumed message in this protocol.

The built-in maps cover *Super Mario Bros.* and *The Legend of Zelda*. The latter map is particularly instructive: alongside gameplay variables it names triangle frequency, rhythm, song, per-voice song position, note duration, and volume. These labels show how a game-specific music driver can become a parameter surface for a modu-

lar patch. They are interpretations recorded in the source map, not promises that all values or cartridge revisions behave musically or even remain playable.

Although the expander’s name and manual invoke Game Genie, the implemented path is direct RAM mutation, not an encoded cartridge-read replacement mechanism. This distinction is useful to an engineer extending the design: the module edits mutable program state, and the running game can overwrite that state again. A control’s persistence depends on both the expander’s updates and the program’s own writes. Numeric continuity at the input also does not imply semantic continuity in the game; adjacent byte values can select unrelated songs, objects, or states.

The available module is the input expander. Code for an Output Genie remains commented out, and no general game-memory-to-CV output is registered. The present system therefore supports memory intervention, not a complete bidirectional memory interface. Its frame-derived gate and audio outputs remain available for feedback through the surrounding patch.

6 Design Implications

6.1 Coupled time as an expressive control

RackNES makes the relationship between sound generation and program time audible and patchable. A slow modulation of the requested execution rate can affect the progression of a game’s sound routines alongside graphics and gameplay. A conceptual patch sends the same modulation source elsewhere in the rack while using the frame-derived gate to drive a divider. The result is a shared source of change between console execution and other modules, with the timing qualifications of Section 4.

This design makes a practical distinction between *coupling* and *calibration*. Coupling is present because the subsystems advance through one stepping boundary. Calibration would require a well-defined relationship among requested machine time, rendered samples, and output phase. A future implementation can preserve the first property while improving the second; they need not be treated as the same requirement.

6.2 State recall as a branching phrase

A second conceptual patch saves after a musically useful event, then sends a divided clock to load. Longer intervals permit more of the program’s evolution before recall; shorter intervals revisit a smaller portion. Adding controller gates or memory writes changes the conditions following each recall. This frames the saved state as the beginning of a phrase whose continuation is computed. It also explains why a saved-state control belongs at the instrument level: its musical meaning depends on program state, future inputs, and the recall boundary, not only on the sound chip’s oscillator parameters.

The implementation’s incomplete snapshot coverage limits repeatability, while the concept points to a clear

engineering responsibility. A documented snapshot contract should specify machine state, clock phase, rendered audio still in flight, host control state, and external resources separately. The appropriate contract depends on whether the intended operation is approximate revisiting, deterministic continuation, or exact sample replay.

6.3 Exposing semantics and separating voices

A third conceptual patch selects a named CV Genie music parameter, supplies a stepped voltage, and routes one voice to an external effect. It combines access to a program’s musical decisions with access to its resulting sound. This illustrates why both layers are useful: a memory write can alter which events are produced, while a downstream processor acts on the voice after the game has allocated and synthesized it.

For future systems, a memory map is part of the musical interface specification. Useful metadata would include cartridge identity, address, value domain, meaning, and the conditions under which the program rewrites the field. A descriptive label alone cannot express all of these constraints. Making such assumptions explicit would help transfer maps among projects without treating one game’s internal layout as a general console API.

7 Engineering Boundaries

Several architectural choices constrain the present implementation. The per-sample cycle loop has no fractional accumulator, and its work rises with the requested rate. Audio extraction allocates temporary storage. State serialization allocates JSON objects, and restoration invokes the cartridge loading path, including file access, from the processing callback. Frame copies also occur there. These are concrete sources of variable callback work; source inspection alone cannot quantify their cost or establish a real-time execution guarantee.

A revised implementation could retain the musical interface while carrying fractional cycle debt, specifying one coherent audio timebase, consuming rendered samples in sequence, and separating prepared state changes from file access. Snapshot coverage and serializer correctness would need explicit treatment before claiming deterministic continuation. Such changes would also need to account for existing patches that depend on the historical rate or output behavior. These are engineering directions motivated by the implementation, not results of an optimization campaign.

The account is limited to the inspected source and documentation. Cartridge compatibility, hardware fidelity, callback latency, and performance practice remain outside its scope. The patch structures identify design possibilities; they are not records of measured or observed performances.

8 Conclusion

RackNES treats a running console program as part of a modular musical instrument. Controller signals act through gameplay, execution controls alter time and saved conditions, and CV Genie reaches named program variables. Individual audio outputs then connect that computation to the rest of a patch. The architecture makes state and temporal coupling central to instrument design, while its current timing, audio conversion, and serialization expose the boundaries an engineer must specify. The transferable idea is to make computation itself available for musical intervention, with clear accounts of what a control changes, what a snapshot preserves, and how emulated events become host audio.

Acknowledgments and Availability

CV Genie was contributed by @anlexmatos; its memory-map source credits the Data Crystal reverse-engineering wiki. The implementation builds on Amish Naidu and contributors’ SimpleNES [13], adapted through the author’s nes-py [14]; Shay Green’s (blargg’s) Nes_Snd_Emu, Blip_Buffer, and nes_ntsc [15, 16]; René Nyffenegger’s cpp-base64 [18]; and VCV Rack [17]. Source, manuals, and the report are available from github.com/Kautenja/RackNES. The report’s `sources.md` records the inspected revision, source locations, and literature provenance. The source-code license is GPL-3.0-or-later, with separate artwork and dependency terms recorded in the repository’s [license guide](#) and [bundled notices](#). Cartridge images are not supplied with this report.

References

- [1] C. Kauten and contributors, “RackNES,” software, version 2.1.0, 2022. Source revision `e8c99bf86295`. [Archived source revision](#); [project changelog](#).
- [2] R. A. Moog, “Voltage controlled electronic music modules,” *Journal of the Audio Engineering Society*, vol. 13, no. 3, pp. 200–206, 1965. <https://aes.org/publications/elibrary-page/?id=1204>.
- [3] A. Hunt, M. M. Wanderley, and M. Paradis, “The importance of parameter mapping in electronic instrument design,” in *Proceedings of the International Conference on New Interfaces for Musical Expression (NIME)*, pp. 88–93, 2002. [doi:10.5281/zenodo.1176424](https://doi.org/10.5281/zenodo.1176424).
- [4] A. Gonçalves, “Towards a voltage-controlled computer control and interaction beyond an embedded system,” in *Proceedings of NIME*, pp. 92–95, 2011. [doi:10.5281/zenodo.1178035](https://doi.org/10.5281/zenodo.1178035).
- [5] K. Collins, “In the loop: Creativity and constraint in 8-bit video game audio,” *twentieth-century music*, vol. 4, no. 2, pp. 209–227, 2007. [doi:10.1017/S1478572208000510](https://doi.org/10.1017/S1478572208000510).

- [6] K. B. McAlpine, *Bits and Pieces: A History of Chiptunes*. Oxford University Press, 2018. doi:10.1093/oso/9780190496098.001.0001.
- [7] J. Kotlinski, *Little Sound Dj v9.2.6: Operating Manual*, May 9, 2021. https://www.littlesounddj.com/lsd/latest/documentation/LSDj_9_2_6.pdf.
- [8] B. Olson, “Transforming 8-bit video games into musical interfaces via reverse engineering and augmentation,” in *Proceedings of NIME*, Brisbane, Australia, pp. 73–77, 2016. doi:10.5281/zenodo.1176100.
- [9] M. Cerqueira, S. Salazar, and G. Wang, “SoundCraft: Transducing StarCraft 2,” in *Proceedings of NIME*, pp. 243–247, 2013. doi:10.5281/zenodo.1178492.
- [10] LOOK MUM NO COMPUTER, “Gameboy Megamachine,” project documentation. Accessed September 30, 2026. <https://www.lookmumnocomputer.com/gameboy-megamachine>.
- [11] NESdev contributors, “Cycle reference chart,” *NESdev Wiki*. Accessed September 30, 2026. https://www.nesdev.org/wiki/Cycle_reference_chart.
- [12] NESdev contributors, “APU mixer,” *NESdev Wiki*. Accessed September 30, 2026. https://www.nesdev.org/wiki/APU_Mixer.
- [13] A. Naidu and contributors, “SimpleNES,” software and project documentation. Accessed September 30, 2026. <https://github.com/amhndu/SimpleNES>.
- [14] C. Kauten and contributors, “nes-py,” software and project documentation. Accessed September 30, 2026. <https://github.com/Kautenja/nes-py>.
- [15] S. Green (blargg), “Blargg’s audio libraries,” author documentation for Nes_Snd_Emu and Blip_Buffer. Accessed September 30, 2026. <https://www.slack.net/~ant/libs/audio.html>.
- [16] S. Green (blargg), “Blargg’s NTSC libraries,” author documentation for nes_ntsc. Accessed September 30, 2026. <https://www.slack.net/~ant/libs/ntsc.html>.
- [17] VCV, “Plugin API guide,” *VCV Rack Manual*. Accessed September 30, 2026. <https://vcvrack.com/manual/PluginGuide>.
- [18] R. Nyffenegger, “cpp-base64,” software and project documentation. Accessed September 30, 2026. <https://github.com/ReneNyffenegger/cpp-base64>.